



Standard and Deluxe Bench Seat Cover Care & Use Guide

Thank you for purchasing the Solvit Products Bench Seat Cover. This cover is designed to fit all automotive rear bench seats.

INSTALLATION: The cover is held in place at the top by means of two adjustable web straps which go around the rear headrests. There are two sets of four grommet positions on the edge of the cover, which allow for various headrest configurations. Lay the cover in place on the rear seat and choose the grommet positions which best match the location of each headrest. Loop each strap around its respective headrest and attach it to these grommets. Using the metal slider, adjust the length of each strap to achieve the best fit.



Next, locate the two Sta-put™ devices on the underside of the seat cover. These consist of a short piece of plastic tubing attached to the cover by a short strap. Push the tube into the crevice where the seat back meets the seat bottom cushion. The Sta-puts can be removed with a strong tug, but will hold firmly enough to keep the cover in place under normal use.




There are elastic straps sewn underneath each side of the cover. These will slip into the space between the seat bottom and the floor. There are also two detachable elastic straps included (with “S” hooks on one end) for use on seats that are elevated above the floor of the vehicle. Attach the snap-swivel hook on one end of the strap to the grommet on the side of the cover and attach the “S” hook under the seat. Please note these straps are optional and might not work when the seat is flush with the vehicle floor.



Side vents: The cover includes two side vents which can be opened or closed by means of hook and loop tape. For narrower vehicles, the fit will be improved by leaving the vents open. Experiment to find the best fit for your vehicle.

Seat belt slits: The cover also includes two slits which allow seat belt buckles to pass through. These slits are oversized to fit all vehicle configurations. For your pet's comfort, we suggest stowing the buckles under the cover when not in use.

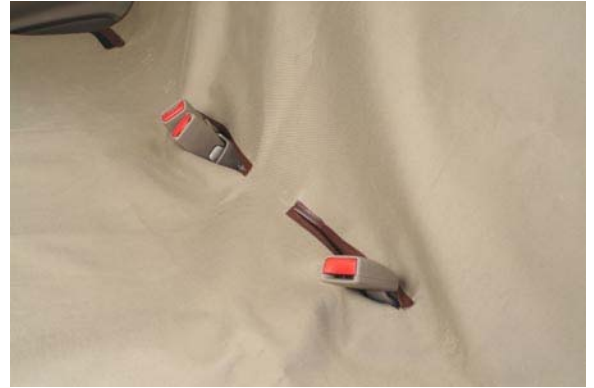

Cleaning: Promptly wipe up any foreign matter or standing liquid with a damp cloth or sponge. Machine wash the cover in a commercial size front loading washing machine. Use cold water with a mild detergent. Line dry.

CAUTION: Always make sure the vehicle seat is dry before installing the Solvit Bench Seat Cover.

Warranty: The Bench Seat Cover is warranted to be free from defects in materials or workmanship for a period of one (1) year from date of purchase. A copy of the original sales receipt is required for warranty issues.

SOLVIT Products is dedicated to offering innovative solutions to improve pets' quality of life. Please feel free to contact us with any questions, comments, or warranty issues. Thank you for your purchase!

(This document available in color on our website)